

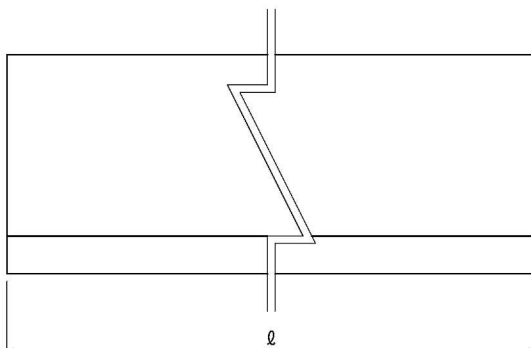


鉄筋コンクリートU形


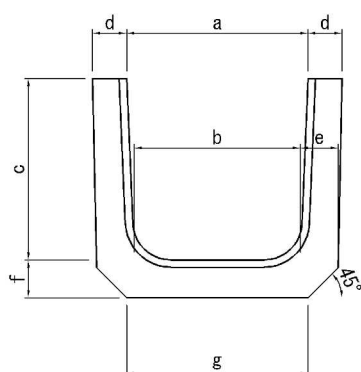


目地の詳細図



■寸法表


呼び径	a	b	c	d	e	f	g	r	単位:mm	
									有効長 ℓ	標準重量 (kg)
240	240	220	240	45	50	50	240	50	2,000	187
300A	300	260	300	50	60	60	300	50	2,000	236
300B	300	260	300	50	60	60	300	50	2,000	270
300C	300	260	300	50	60	60	300	50	2,000	312
360A	360	310	360	50	65	65	360	50	2,000	306
360B	360	310	360	50	65	65	360	50	2,000	338
450	450	400	450	55	70	70	430	70	2,000	453
600	600	540	600	70	80	80	600	70	2,000	710

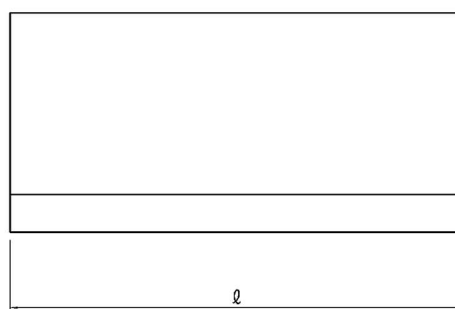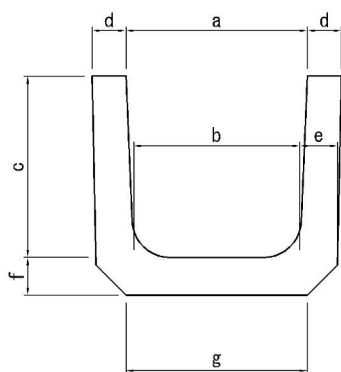

■寸法表

呼び径	a	b	c	d	e	f	g	r	単位:mm	
									有効長 ℓ	標準重量 (kg)
150	150	140	150	30	35	35	160	30	600	25
180	180	170	180	35	40	40	190	50	600	35
240	240	220	240	45	50	50	240	50	600	56
300A	300	260	240	50	60	60	300	50	600	71
300B	300	260	300	50	60	60	300	50	600	81
300C	300	260	360	50	60	65	300	50	600	94
360A	360	310	300	50	65	65	360	50	600	92
360B	360	310	360	50	65	65	360	50	600	102
450	450	400	450	55	70	70	430	70	600	136
600	600	540	600	70	80	80	600	70	600	214

鉄筋コンクリートU形用蓋

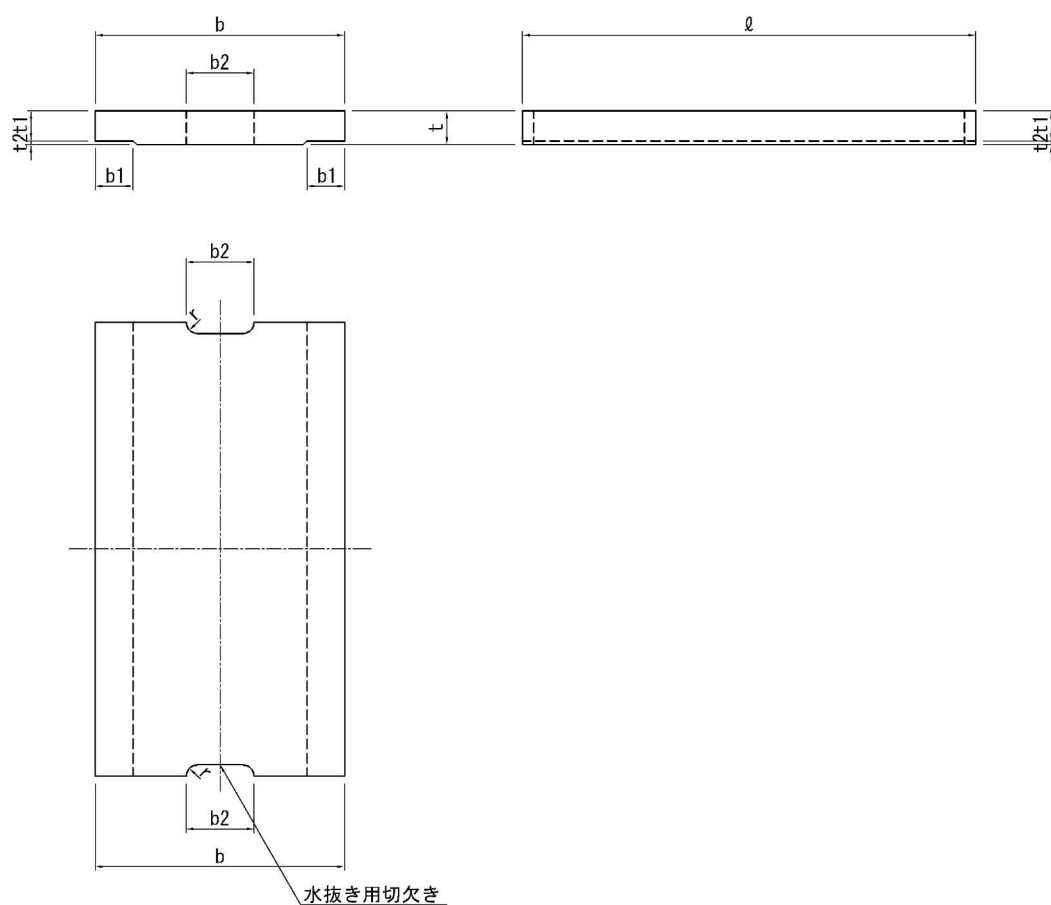


■寸法表

単位:mm

種 類	呼び名	b	b1	t	t1	t2	ℓ	r	b2	標準重量 (kg)
1 類	150	210	35	35	30	5	600	15	75	10
	180	250	40	40	35	5	600	15	75	14
	240	330	50	45	40	5	600	15	90	21
	300	400	55	60	50	10	600	15	100	33
	360	460	55	65	55	10	600	18	120	42
	450	560	60	70	60	10	600	18	120	55
	600	740	75	75	65	10	600	18	150	78
2 類	150	210	35	90	80	10	600	15	75	26
	180	250	40	90	80	10	600	15	75	31
	240	330	50	100	85	15	600	15	90	45
	300	400	55	100	85	15	600	15	100	55
	360	460	55	100	85	15	600	18	120	64
	450	560	60	120	100	20	600	18	120	94
	600	740	75	150	130	20	600	18	150	156

注1：水抜き用切欠きは省くことができる。

千歳市型鉄筋コンクリートU形・U形蓋


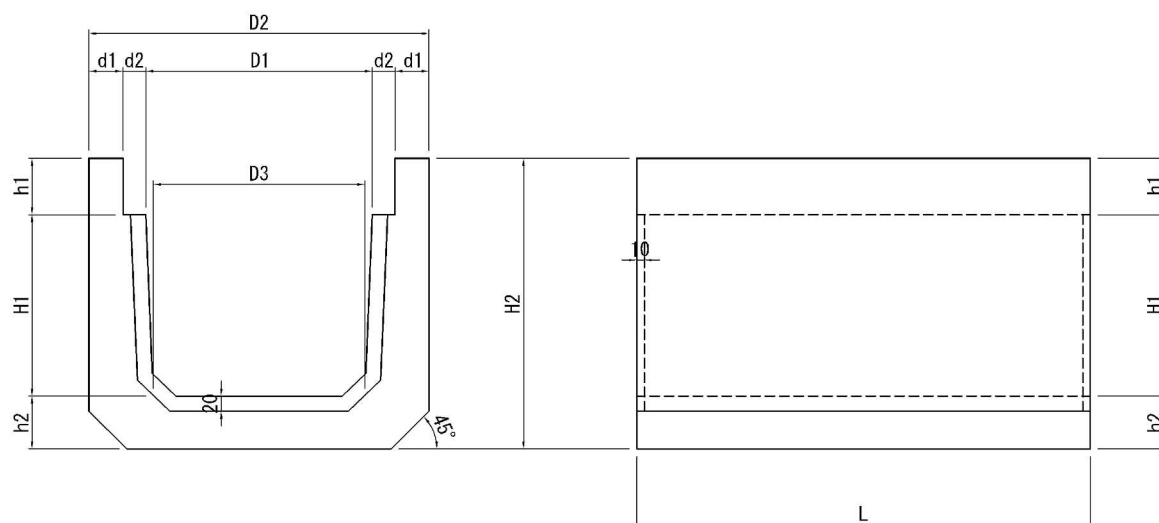


■寸法表

単位:mm

呼び名	幅 D1	D2	D3	d1	d2	高さ H1	H2	h1	h2	長さ L	標準 重量 (kg)
240	300	450	280	45	30	240	385	75	70	600	106
300	300	450	280	45	30	315	460	75	70	1,000	205



■U形蓋

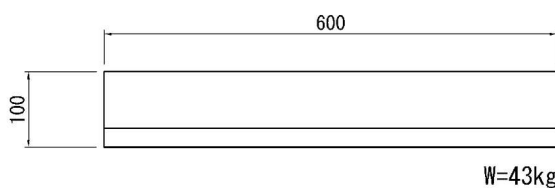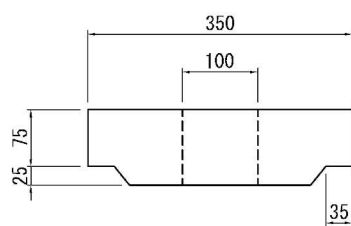

W=43kg



側溝FU-24・FU-30

■側溝FU-24

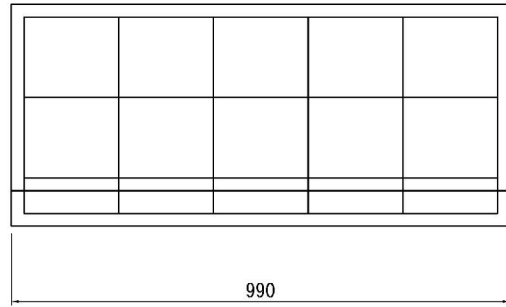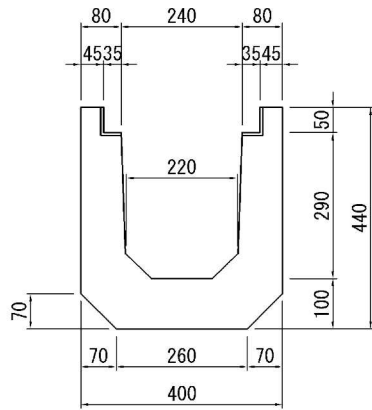

W=233kg

■側溝FU-30

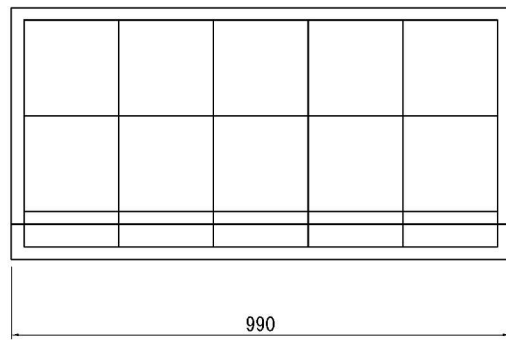
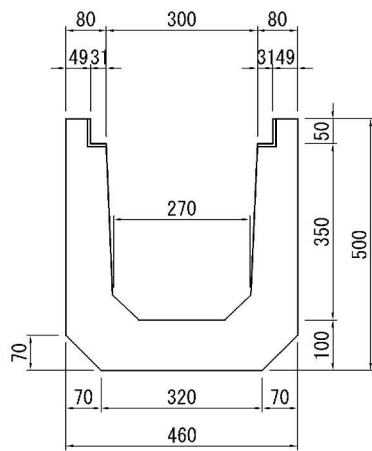


W=266kg

$W=298\text{kg}$



横断側溝450・600ボルト固定式

■横断側溝450ボルト固定式

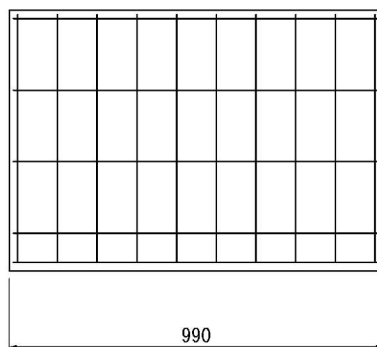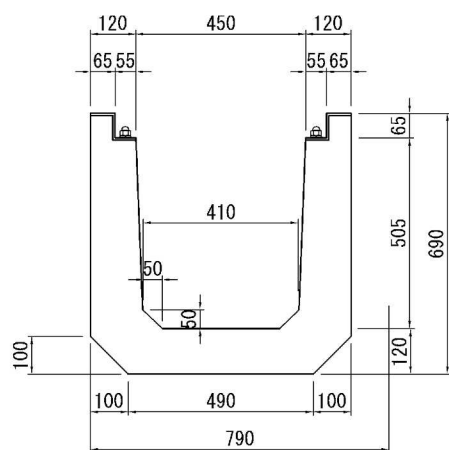

W=515kg



■横断側溝600ボルト固定式

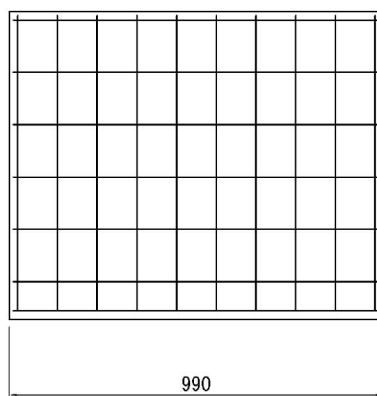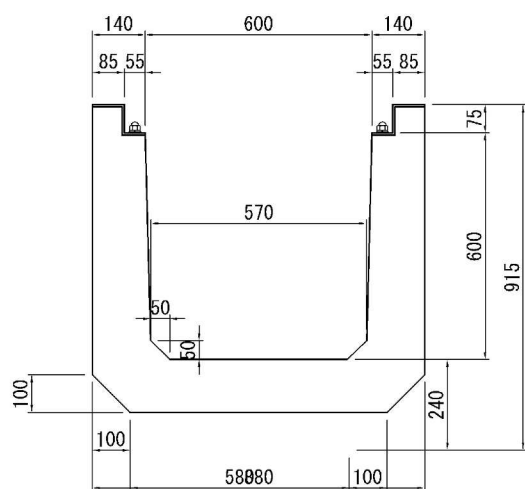

W=680kg



札幌市型トラフ1型・2型U字側溝・蓋

■1型U字側溝

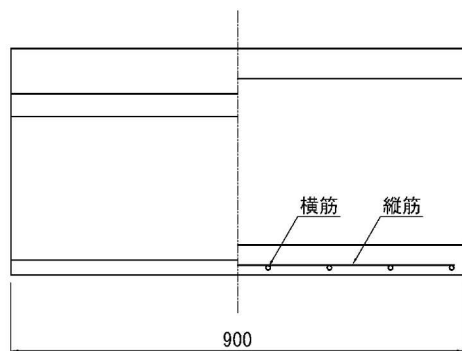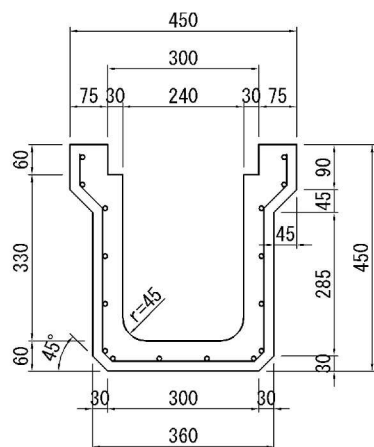



W=160kg

■2型U字側溝

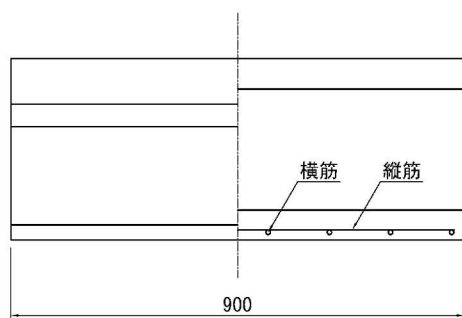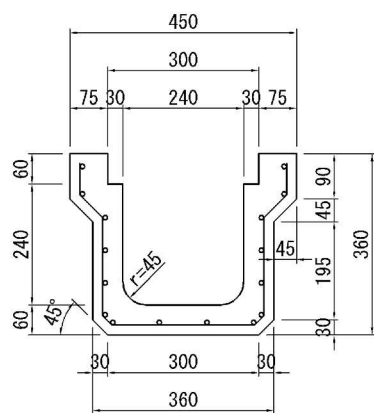

W=141kg


■1型・2型U字側溝蓋




W=13kg

札幌市型トラフ3型U字側溝・蓋

■3型U字側溝

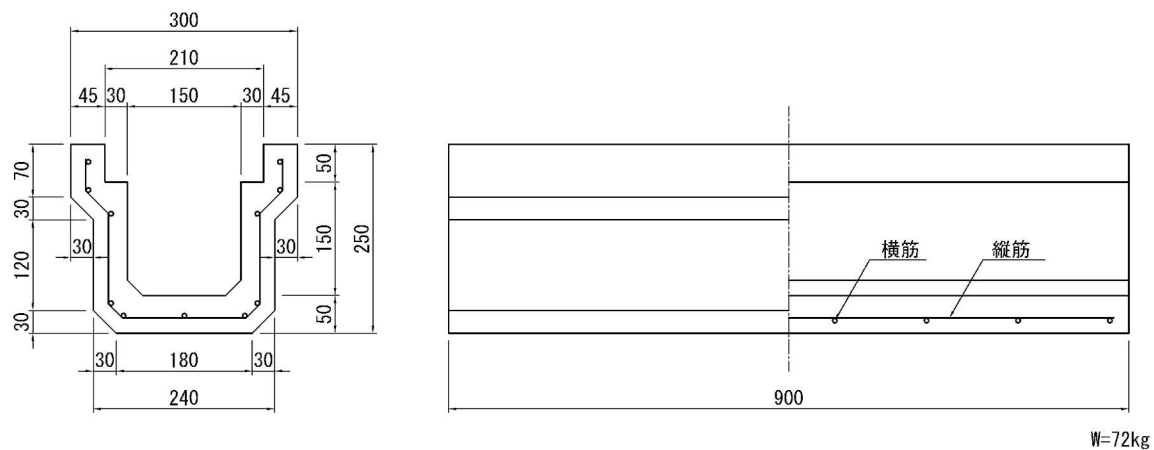


■3型U字側溝蓋

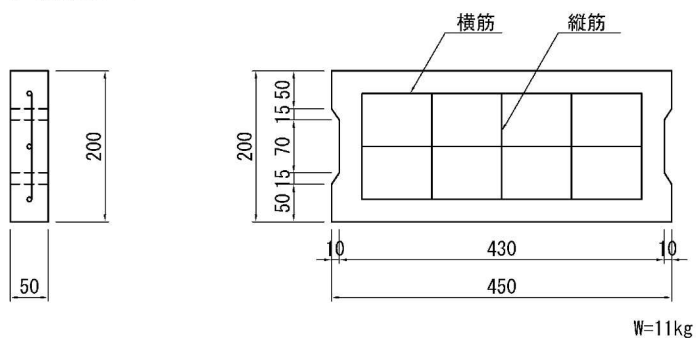


組合せ暗渠ブロック


■上ブロック

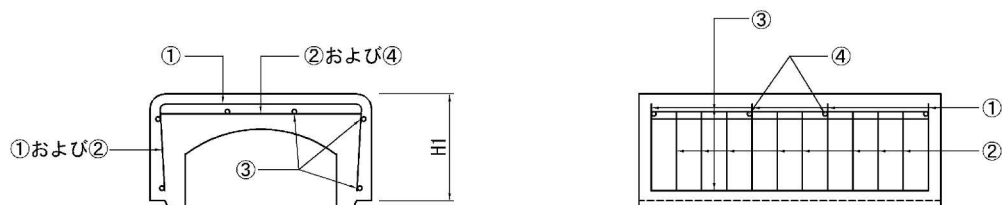

■下ブロック

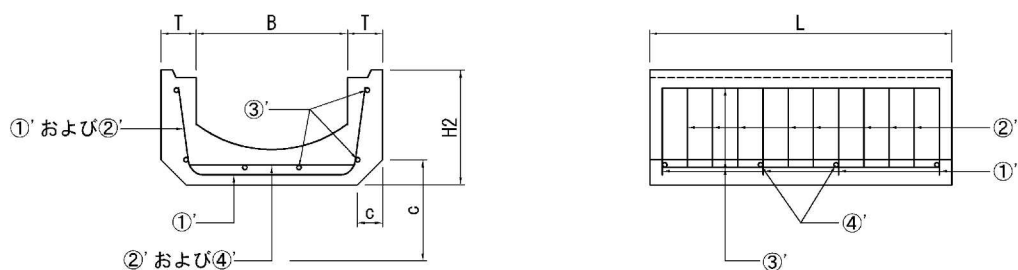

●上下組合せ部詳細

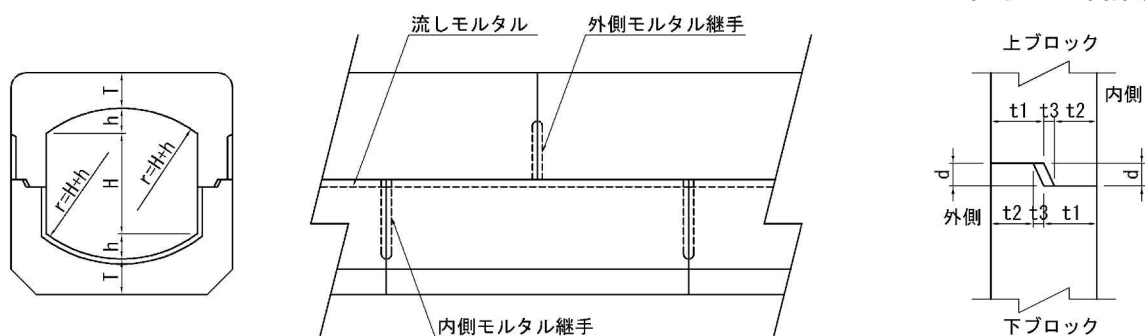


■寸法表

呼び名	L	B	T	H	h	H1	H2	r	t1	t2	t3	d	c	重量 (kg) 組
180	600	180	60	120	30	142	158	150	30	24	6	15	-	88
240	600	240	70	160	40	182	198	200	35	28	7	15	40	130
300	600	300	70	200	50	212	228	250	35	28	7	15	50	160
360	600	360	75	240	60	248	262	300	38	30	7	15	50	207
450	500	450	90	300	75	305	325	375	45	35	10	20	60	264
600	500	600	100	400	100	390	410	500	50	40	10	20	60	385

単位:mm


皿型側溝

■皿型ブロックA

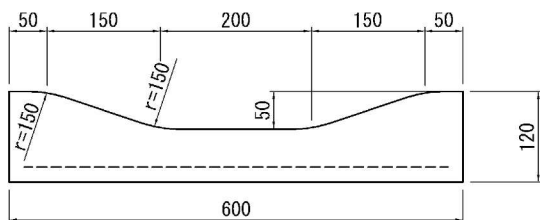


W=64kg

■皿型ブロックB

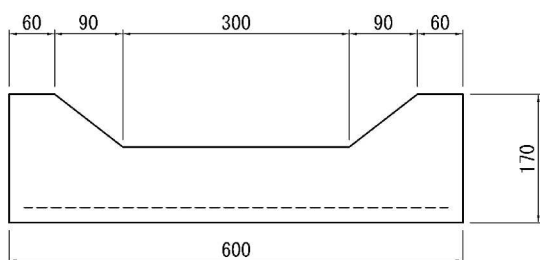


W=106kg

■皿型ブロックC

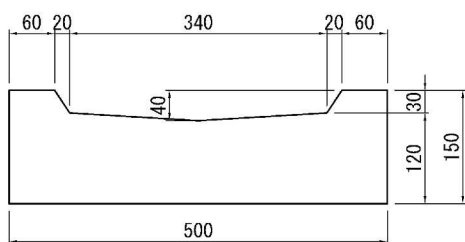

W=90kg



■皿型ブロックD

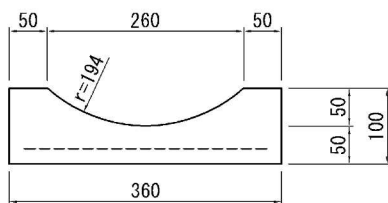

W=38kg



皿型側溝

■皿型ブロックE

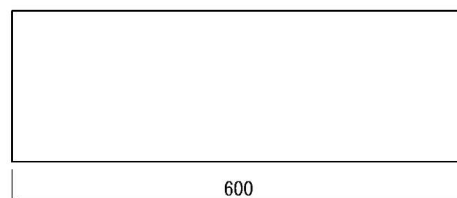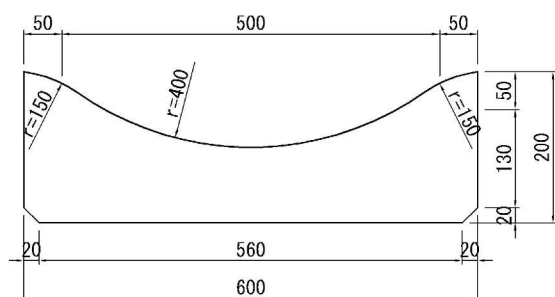



W=122kg

■皿型ブロックF

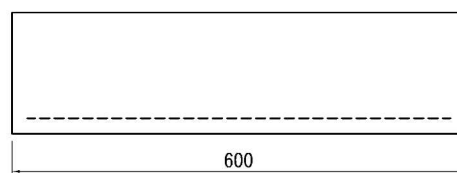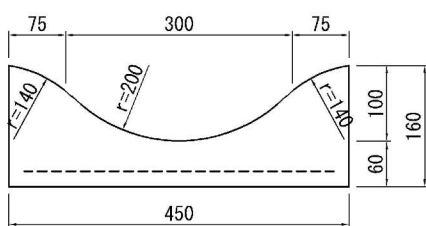



W=72kg

■S-2型

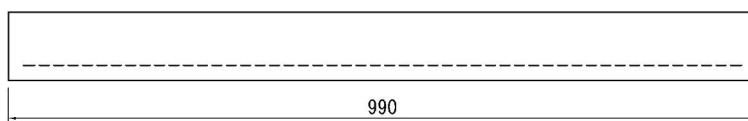

W=55kg



■開発型

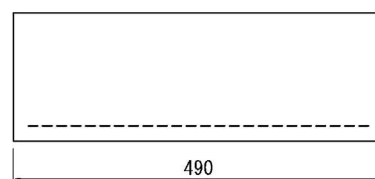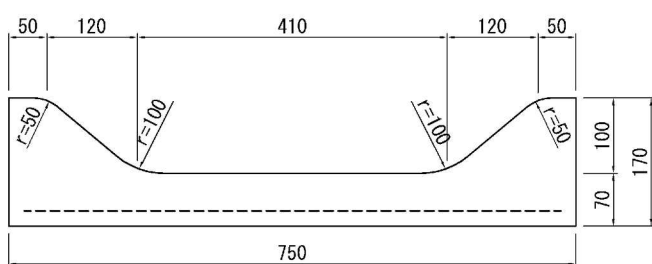

W=87kg



皿型側溝

■道建設部1型

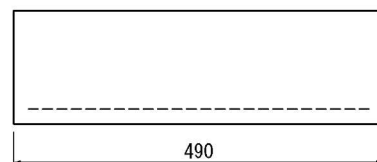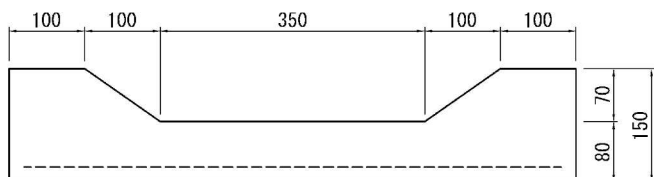



W=95kg

■道建設部3型

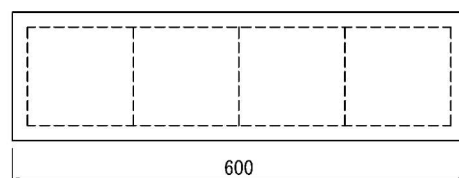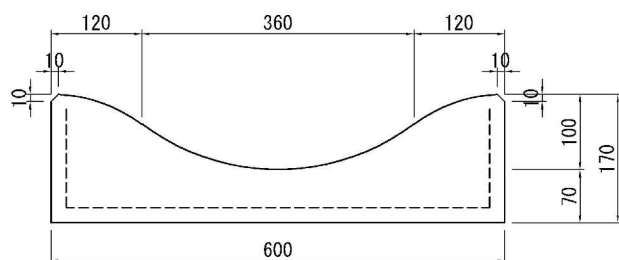



W=98kg

■道建設部4型

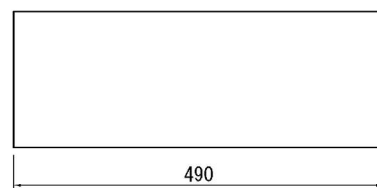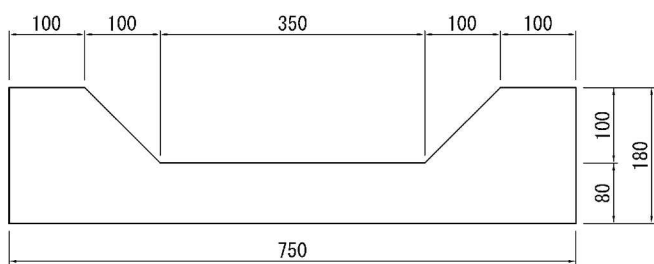

W=106kg



■道建設部5型

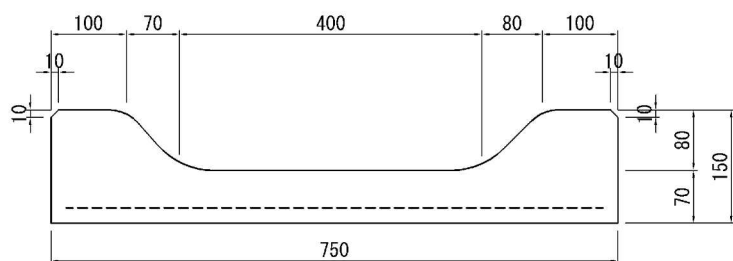



W=73kg

ロードガッター



■ロードガッターA型

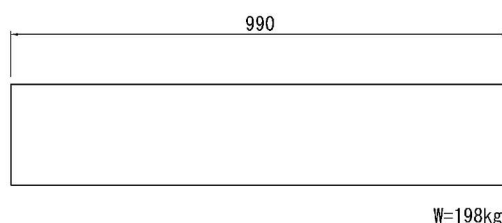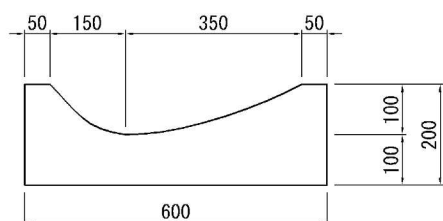


■ロードガッターB型

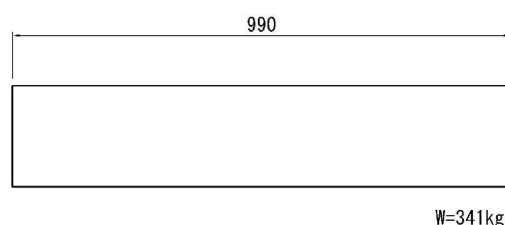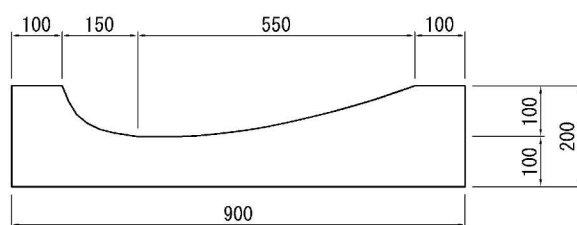

■円形側溝 縦断タイプφ200 (T-25)

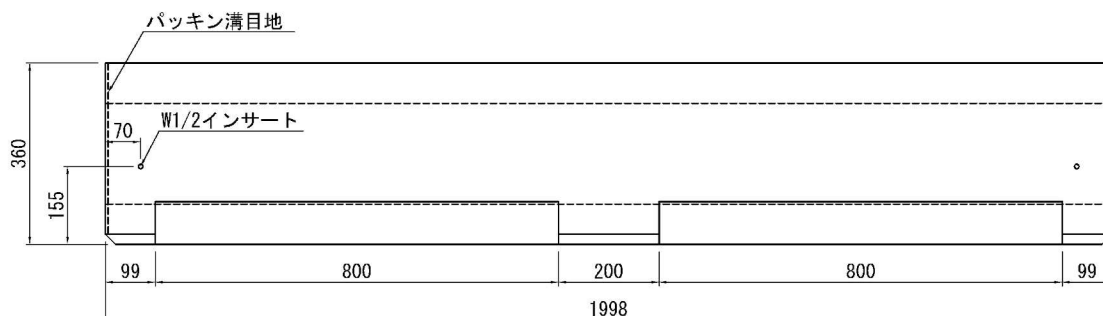

V型トラフ

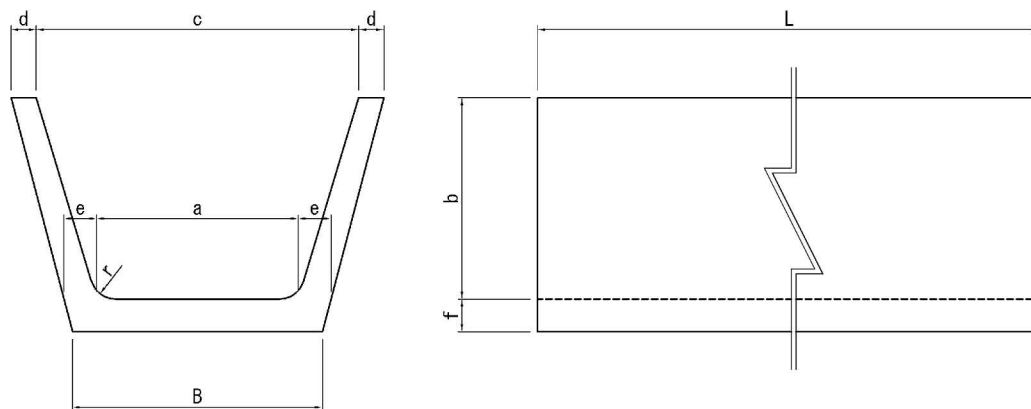


■ 規格表


単位:mm

呼び名	a	b	c	d	e	f	B	r	L	標準重量 (kg)
V300×300	300	300	480	50	60	60	388	50	2,000	263
V300×400	300	400	540	50	65	65	396	50	2,000	336
V400×400	400	400	640	50	65	65	496	50	2,000	363
V450×450	450	450	720	55	70	70	553	60	2,000	443
V500×500	500	500	800	60	70	71	601	60	2,000	500
V600×600	600	600	960	70	80	80	715	100	2,000	690
V700×700	700	700	1,120	73	90	90	830	150	2,000	1,007
V800×800	800	800	1,280	80	105	105	954	120	2,000	1,257
V900×900	900	900	1,440	80	110	110	1,060	150	2,000	1,352
V1,000×1,000	1,000	1,000	1,600	90	110	110	1,158	150	2,000	1,770
V1,100×1,100	1,100	1,100	1,760	90	120	120	1,275	180	2,000	1,941
V1,200×1,200	1,200	1,200	1,920	95	125	125	1,381	180	2,000	2,013
V1,300×1,300	1,300	1,300	2,080	95	130	130	1,488	200	2,000	2,260
V1,400×1,400	1,400	1,400	2,240	95	135	135	1,595	220	2,000	2,706


NEXCO用プレキャストコンクリートU型側溝

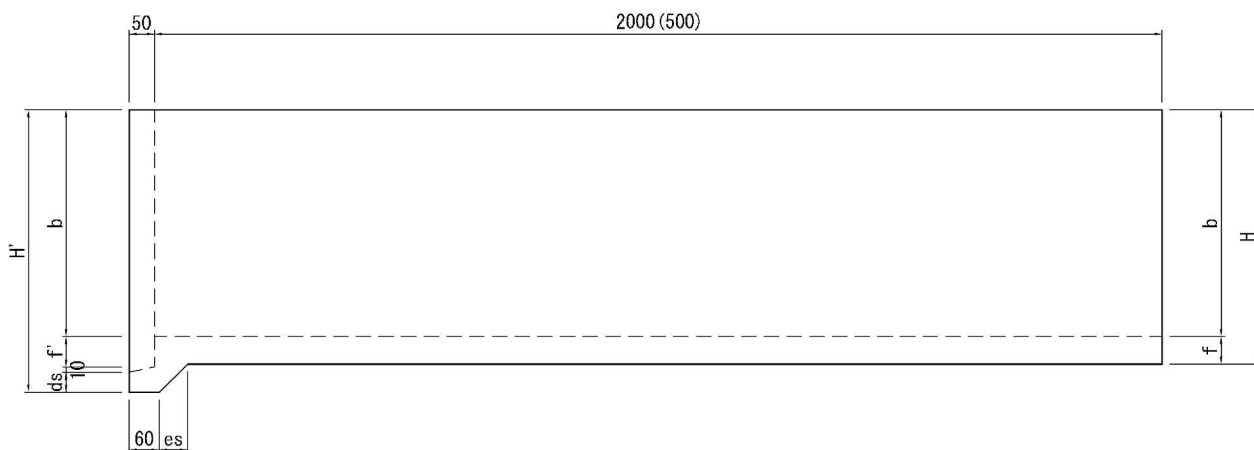

●ソケット部詳細

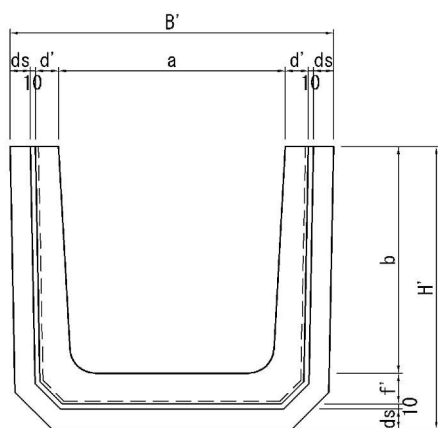


●中央部詳細

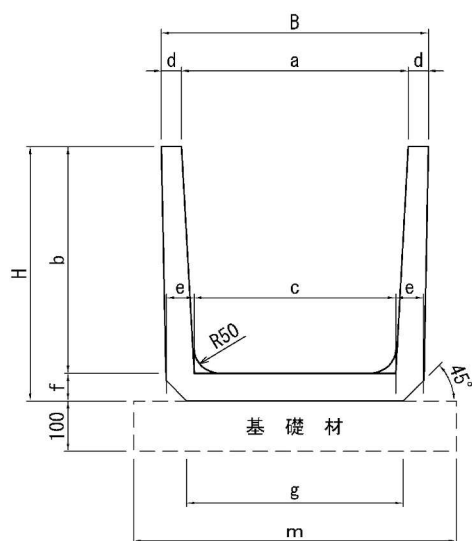


■寸法表

呼び名	a	b	c	d	e	f	g	B	H	d'	ds	es	f'	B'	H'	m	質量 (kg)
Ds-PuL・0.30・0.30	300	300	260	40	50	50	300	380	350	46	30	30	56	472	396	480	230
0.45・0.45	450	450	400	40	55	55	430	530	505	46	40	56	61	642	561	640	370
0.60・0.60	600	600	540	40	60	60	600	680	660	46	55	71	66	822	731	800	522


NEXCO用プレキャストコンクリートU型側溝(補強型)

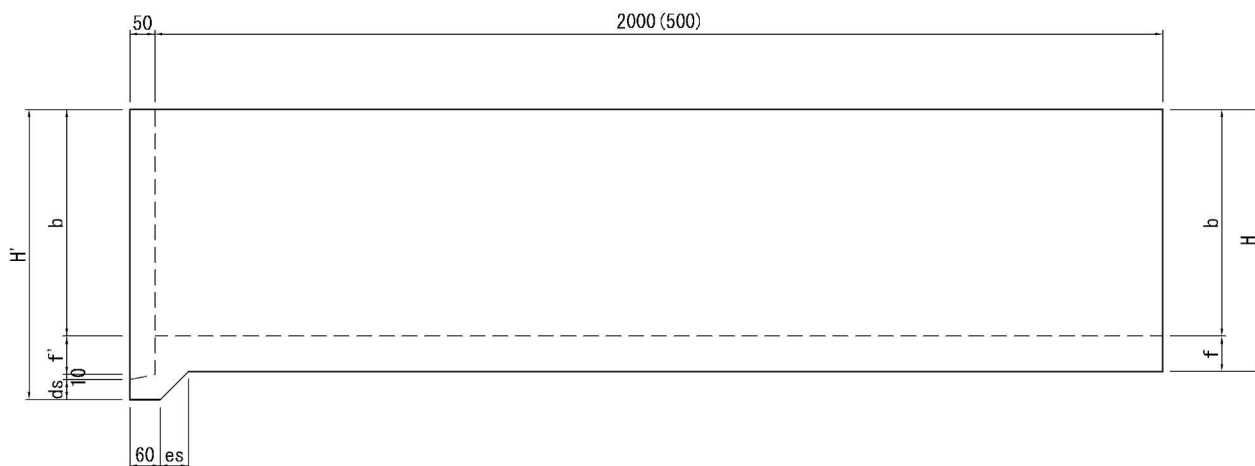

●ソケット部詳細

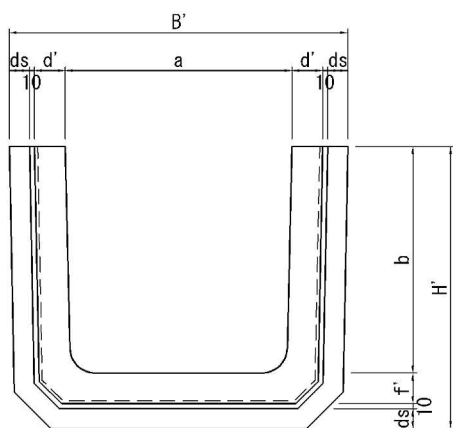

●中央部詳細

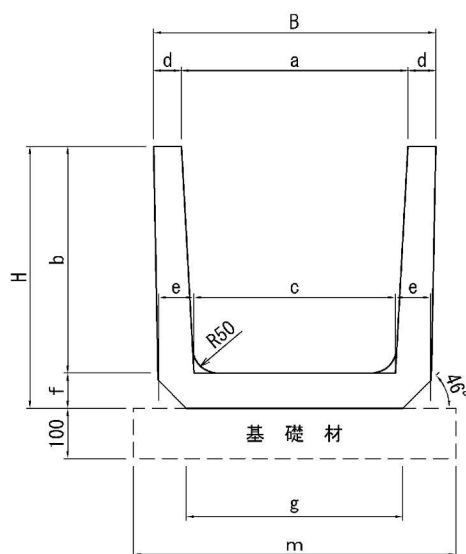


■寸法表


単位:mm

呼び名	a	b	c	d	e	f	g	B	H	d'	ds	es	f'	B'	H'	m	質量 (kg)
Ds-PuL・0.30・0.30	300	300	260	50	60	60	300	400	360	56	30	46	66	492	406	480	289
0.45・0.45	450	450	400	55	70	70	430	560	520	61	40	56	76	672	576	640	468
0.60・0.60	600	600	540	70	80	80	600	740	680	76	55	71	86	882	751	800	742


鉄筋コンクリートU形(ジョイント金具付)

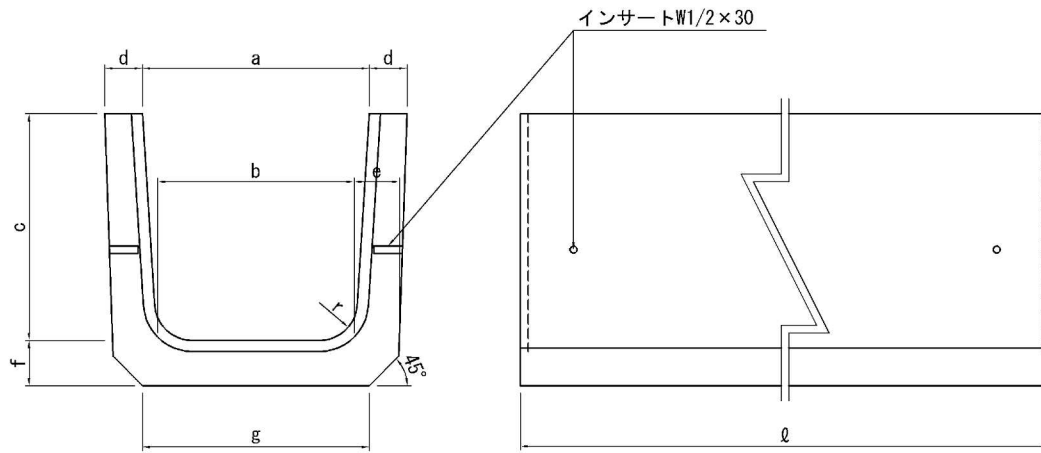

目地の詳細図




接続金物詳細図

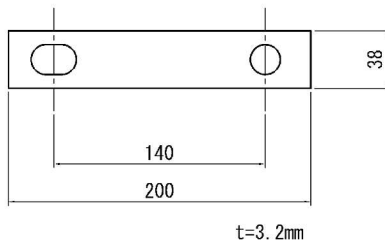


■規格表

呼び名	a	b	c	d	e	f	g	r	ℓ	単位:mm 標準重量 (kg)
PUL (J) 0.3・0.24	300	260	240	50	60	60	300	50	2,000	236
PUL (J) 0.3・0.3	300	260	300	50	60	60	300	50	2,000	270
PUL (J) 0.36・0.36	360	310	360	50	65	65	360	50	2,000	338
PUL (J) 0.45・0.45	450	400	450	55	70	70	430	70	2,000	453
PUL (J) 0.6・0.6	600	540	600	70	80	80	600	70	2,000	710


鉄筋コンクリートベンチフリューム

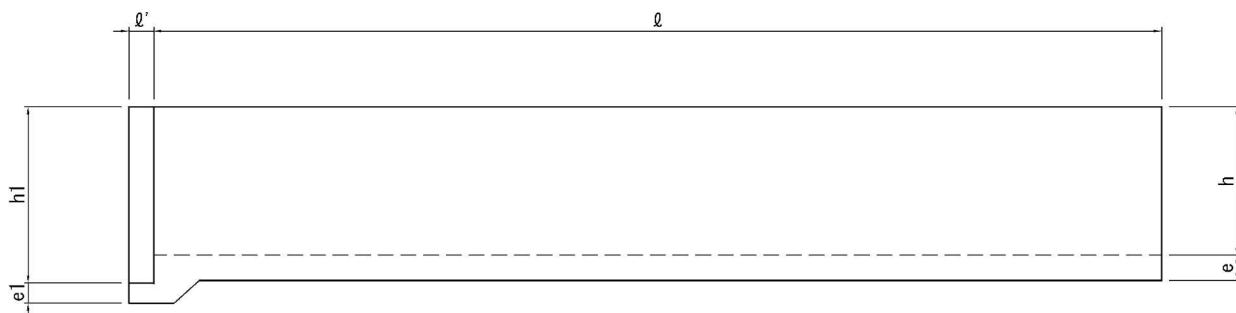

●ソケット部詳細

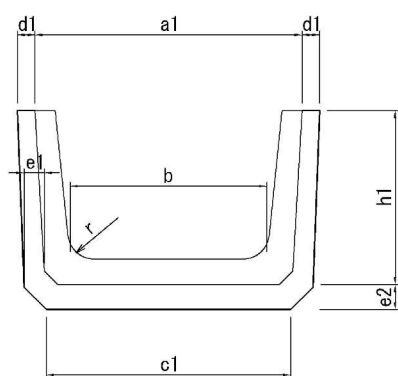

●中央部詳細


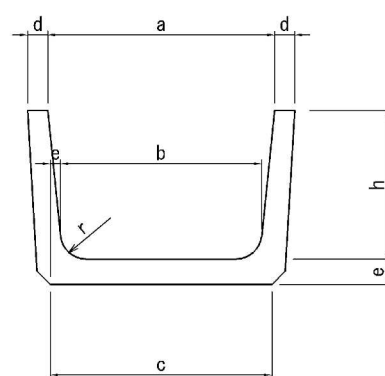


■寸法表

単位:mm

呼び名	内 幅		底幅・厚さ			深さ	長さ	半径								標準重量 (kg)
	a	b	c	d	e	h	ℓ	r	a1	c1	d1	e1	e2	h1	ℓ'	
300	300	260	300	30	40	200	2,000	40	370	340	30	30	40	245	50	146
350	350	300	345	35	45	235	2,000	50	430	390	35	35	45	285	50	193
400	400	345	395	40	50	260	2,000	50	490	440	40	40	50	315	50	244
450	450	390	440	40	50	295	2,000	50	540	485	35	40	50	350	50	271
500	500	435	490	45	55	320	2,000	60	600	540	45	45	55	380	50	325
550	550	475	535	45	60	355	2,000	60	650	590	45	45	60	420	50	362
600	600	520	580	45	60	380	2,000	60	700	635	45	60	60	445	50	399
700	700	610	680	50	70	440	2,000	70	810	745	50	50	70	515	50	535
800	800	695	770	50	75	490	2,000	70	910	825	50	50	75	570	50	624

鉄筋コンクリート角フリューム

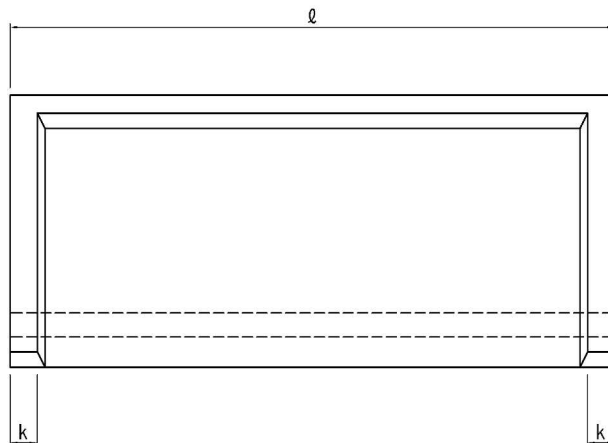
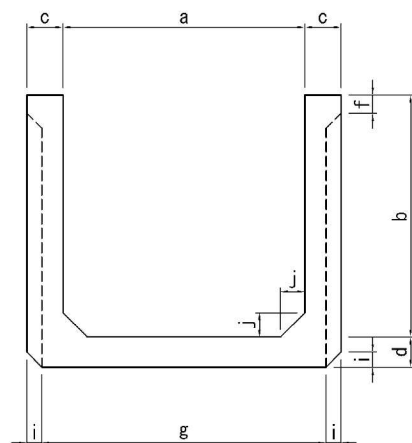


■ 規格表

呼び名	a	b	c	d	f	g	i	j	k	ℓ	標準重量 (kg)
0.80・0.80・2.00	800	800	120	100	60	940	50	80	90	2,000	1,123
1.00・1.00・2.00	1,000	1,000	150	120	90	1,200	50	160	90	2,000	1,903
1.20・1.20・2.00	1,200	1,200	160	130	90	1,420	50	150	90	2,000	2,425
1.30・1.30・2.00	1,300	1,300	165	135	90	1,530	50	150	90	2,000	2,618
1.40・1.40・2.00	1,400	1,400	165	140	90	1,630	50	150	90	2,000	2,797
1.50・1.40・2.00	1,500	1,400	165	140	90	1,730	50	150	90	2,000	3,003
1.50・1.50・2.00	1,500	1,500	165	160	90	1,730	60	150	90	2,000	3,292

単位:mm

ボックスカルバート

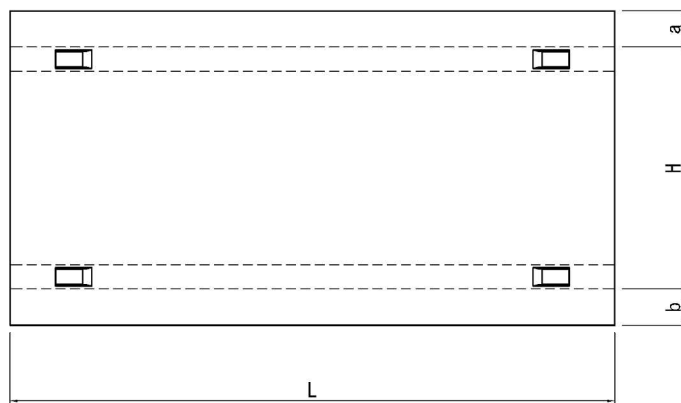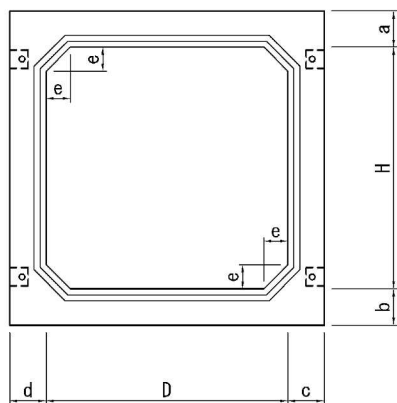

■ 規格表

単位:mm

呼び名	D	H	a	b	c	d	e	L	標準重量 (kg)
0.80・0.80・2.00	800	800	120	120	120	120	80	2,000	2,209
0.90・0.90・2.00	900	900	120	120	120	120	80	2,000	2,462
1.00・1.00・2.00	1,000	1,000	130	130	130	130	150	2,000	3,083
1.10・1.10・2.00	1,100	1,100	130	130	130	130	150	2,000	3,355
1.20・1.20・2.00	1,200	1,200	130	130	130	130	150	2,000	3,609